


塔身 Masts / 反力 Reactions / T320-20X19

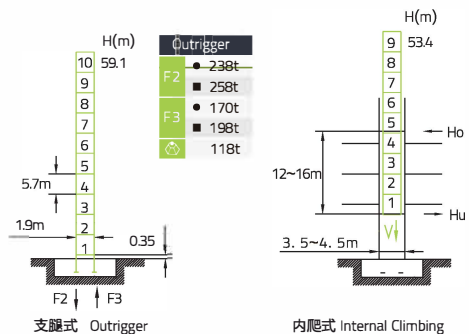


Internal climbing

- Ho ● 40~35t
- Ho ■ 21~17t
- Hu ● 36~31t
- Hu ■ 8~4.5t
- v 180t

- 工作状态反力
Reactions in service
- 非工作状态反力
Reactions out of service
- ⊕ 独立高度、最大起重臂的自重 (不含平衡重、吊重)
Weight with max free-standing height, max jib
(without counter-weight and load)

附着 Anchorages / T320-20X19

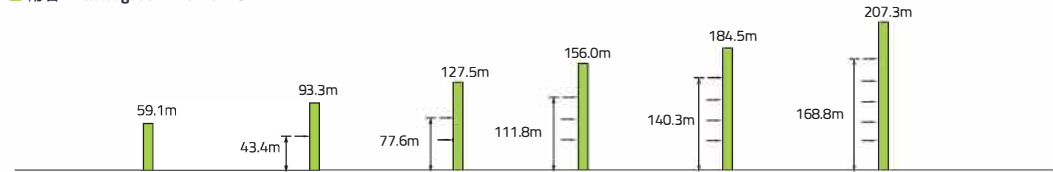








起重特性 Load Diagrams

高度 (m)	Max. Capacity m/t	15	20	25	30	35	40	45	50	55	60	
60m (R=61.5)	⊕	3.0~33.2/10.00		10.00			9.37	7.96	6.87	5.00	5.29	4.70
	⊕⊕	3.0~18.2/20.00	20.00	17.93	13.79	11.08	9.18	7.76	6.67	5.80	5.00	4.50
55m (R=56.5)	⊕	3.0~34.4/10.00		10.00			9.81	8.35	7.23	6.33	5.60	
	⊕⊕	3.0~18.8/20.00	20.00	18.64	14.37	11.58	9.61	8.15	7.03	6.13	5.40	
50m (R=51.5)	⊕	3.0~35.6/10.00		10.00			8.69	7.53	6.60			
	⊕⊕	3.0~19.4/20.00	20.00	19.34	14.92	12.04	10.00	8.49	7.33	6.40		
45m (R=46.5)	⊕	3.0~36.3/10.00		10.00			8.89	7.70				
	⊕⊕	3.0~19.8/20.00	20.00	19.74	15.24	12.30	10.23	8.69	7.50			
40m (R=41.5)	⊕	3.0~36.3/10.00		10.00			8.90					
	⊕⊕	3.0~19.8/20.00	20.00	19.77	15.26	12.32	10.24	8.70				
35m (R=36.5)	⊕	3.0~35.0/10.00		10.00								
	⊕⊕	3.0~19.9/20.00	20.00	19.87	15.34	12.39	10.30					
30m (R=31.5)	⊕	3.0~30.0/10.00		10.00								
	⊕⊕	3.0~19.5/20.00	20.00	19.44	15.00	12.10						
25m (R=26.5)	⊕	3.0~25.0/10.00		10.00								
	⊕⊕	3.0~19.1/20.00	20.00	18.93	14.60							
20m (R=21.5)	⊕	3.0~20.0/10.00		10.00								
	⊕⊕	3.0~18.5/20.00	20.00	18.30								

T320-20 000 "Лекс-Строй"

■ 传动机构 Mechanisms

Юридический адрес: 350072, г. Краснодар, ул. Ростовское шоссе 14/2, оф. 311
e-mail: info@zoomlionpro.ru, tel: +7 (861) 205-67-91, +7 (928) 221-97-91

配置 Configuration		H			HH			kW		
		III	IV	V	III	IV	V			
 起升 Hoisting	QPL20100	m/min	40	80	100	20	40	50	75	1000m(6 layers)
			10	5	3	20	10	6		
 回转 Slewing	HPW75F1.130C	r/min	0~0.7						2x7.5	① 超出咨询我们 Consultus if overtop
 变幅 Trolling	BP75A	m/min	0~80						7.5	
 行走 Travelling	ZAH52A-D ZDH52A-D	m/min	0~25						4x5.2	
	380V(±10%)50Hz/400V(±5%)50Hz		97.5+4x5.2 kW							