


T8030-25U 000 "Лекс-Строй"


Юридический адрес: 350072, г. Краснодар, ул. Ростовское шоссе 14/2, оф. 311

e-mail: info@zoomlionpro.ru, tel: +7 (861) 205-67-91, +7 (928) 221-97-91

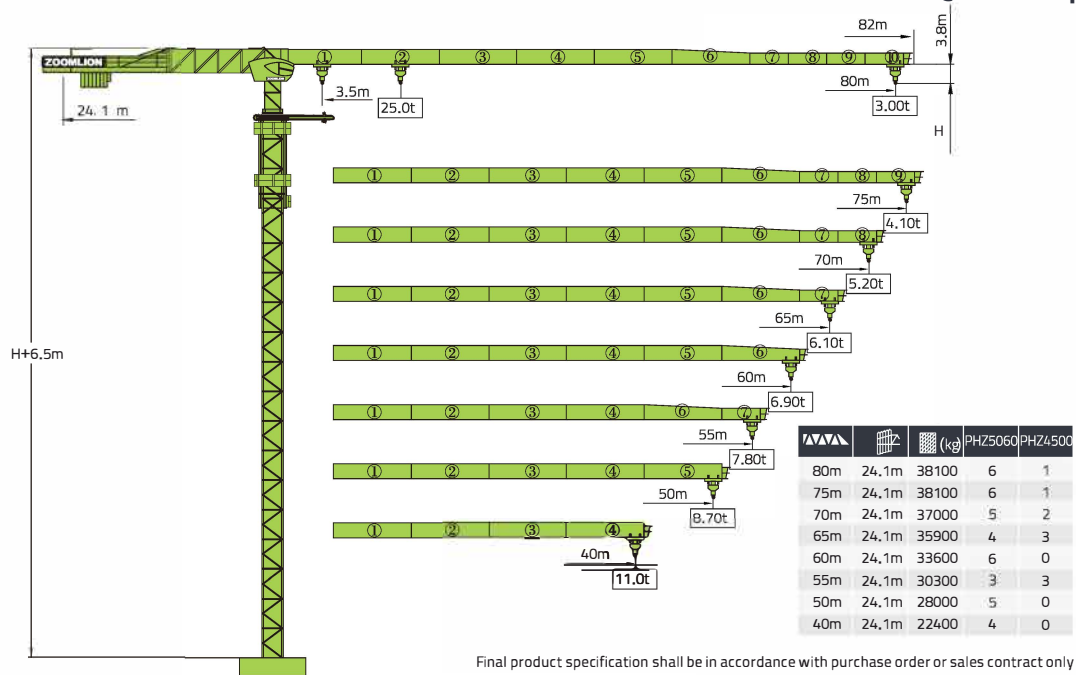

Final product specification shall be in accordance with purchase order or sales contract only

塔身 Masts / 反力 Reactions / T8030-25U

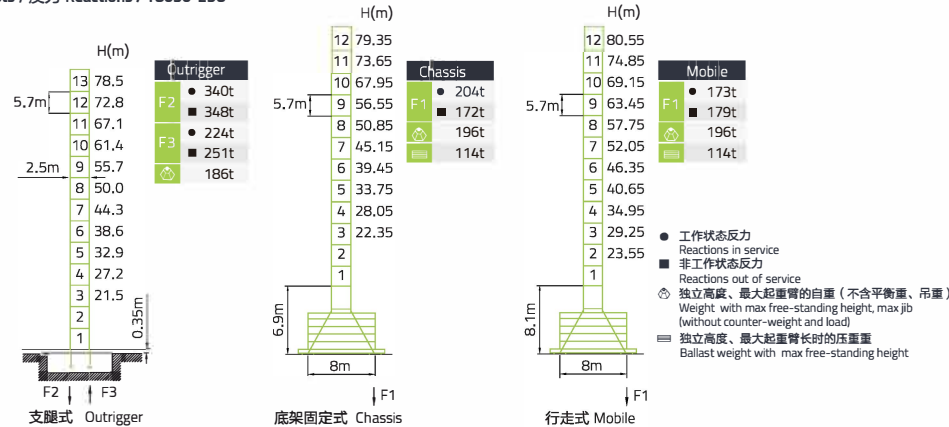



附着 Anchorages / T8030-25U

起重特性 Load Diagrams

R(m)	Max.Capacity m/t	R(m)															
		10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	
80 (R=82)	bd	3.5~27.6/12.50															
	bb	25.00	24.49	17.09	12.84	10.07	8.13	6.69	5.58	4.70	3.98	3.39	2.89	2.46	2.09	1.77	
75 (R=77)	bd	3.5~31.6/12.50															
	bb	25.00	20.18	15.26	12.07	9.83	8.17	6.89	5.88	5.05	4.37	3.79	3.30	2.87			
70 (R=72)	bd	3.5~34.9/12.50															
	bb	25.00	22.67	17.23	13.69	11.21	9.37	7.95	6.83	5.91	5.15	4.52	3.97				
65 (R=67)	bd	3.5~36.4/12.50															
	bb	25.00	23.88	18.18	14.48	11.88	9.95	8.47	7.29	6.33	5.54	4.87					
60 (R=62)	bd	3.5~37.0/12.50															
	bb	25.00	24.29	18.51	14.75	12.11	10.15	8.64	7.45	6.48	5.67						
55 (R=57)	bd	3.5~37.3/12.50															
	bb	25.00	24.56	18.72	14.92	12.26	10.28	8.76	7.55	6.57							
50 (R=52)	bd	3.5~37.0/12.50															
	bb	25.00	24.35	18.55	14.78	12.14	10.18	8.67	7.47								
40 (R=42)	bd	3.5~35.9/12.50															
	bb	25.00	23.50	17.88	14.23	11.67	9.77										

传动机构 Mechanisms

配置 Configuration	m/min	bd			bb			kW		
		III	IV	V	III	IV	V			
起升 Hoisting	QP2580A	27	53	80	13.5	27	40	63	650m(6 layers)	
回转 Slewing	HVV145B1.130B×2 HVV145B2.130B×1	t	12.5	6.25	1	25	12.5	2	3×145 N.m	① 超出咨询我们 Consultus if overtop
变幅 Trolleying	BP110A	r/min	0~0.7					11		
行走 Travelling	ZAK52-B ZBK52-B	m/min	0~100					6×5.2		
	380V(±10%)50Hz/400V(±5%)50Hz	96.5+6×5.2kW								