


Final product specification shall be in accordance with purchase order or sales contract only

塔身 Masts / 反力 Reactions / TC5013A-5C

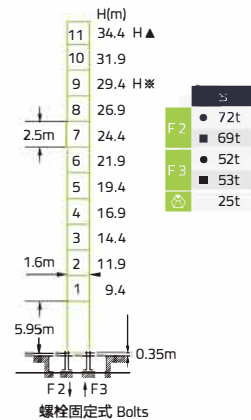

- H※ 销售标配高度 The standard sale height
- H▲ 最大独立高度 Largest free standing height
- 工作状态反力 Reactions in service
- 非工作状态反力 Reactions out of service
- ⊙ 独立高度、最大起重臂的自重 (不含平衡重、吊重) Weight with max free-standing height, max jib (without counter-weight and load)

附着 Anchorages / TC5013A-5C



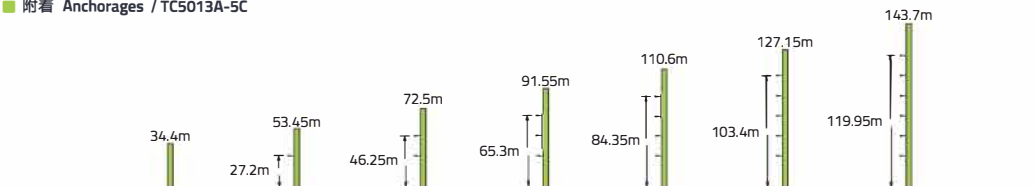


Diagram	Diagram	(kg)	PHZ2300	PHZ1500
		9900	3	2
		9900	3	2
		8400	3	1
		6900	3	0
		6100	2	1

塔身 Masts / 反力 Reactions / TC5013A-5G



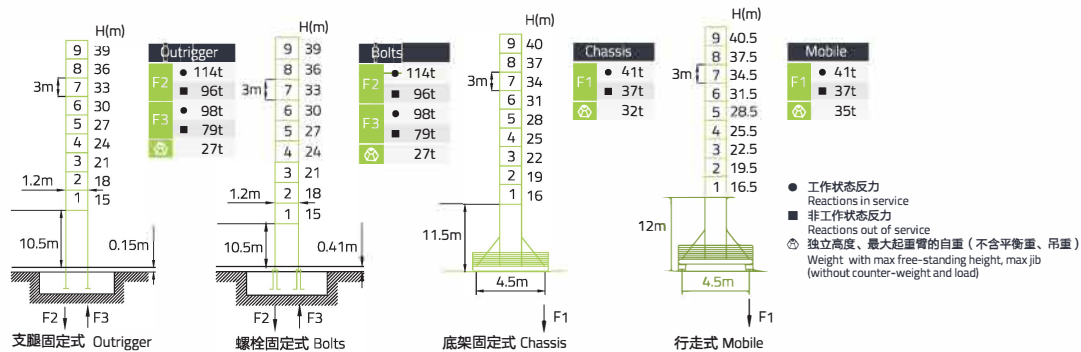

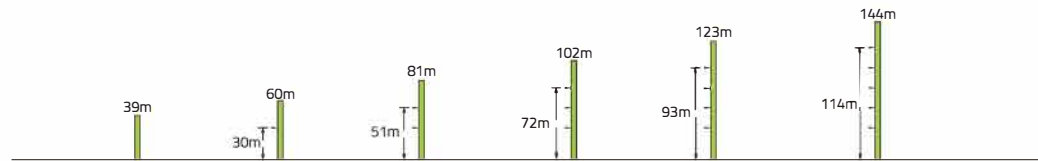


附着 Anchorages / TC5013A-5G








起重特性 Load Diagrams

R(m)		Max Capacity m/t	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0
50 (R=51.5)	bd	2.5~29.9/2.50	2.50						2.49	2.26	2.06	1.89	1.74	1.61	1.49	1.39	1.3
	bb	2.5~16.4/5.00	5.00	4.65	3.99	3.47	3.06	2.73	2.46	2.23	2.03	1.86	1.71	1.57	1.46	1.35	1.26
45 (R=46.5)	bd	2.5~31.5/2.50	2.50						2.41	2.20	2.02	1.86	1.72	1.60			
	bb	2.5~17.3/5.00	5.00	4.22	3.38	3.25	2.90	2.61	2.37	2.16	1.98	1.83	1.68	1.56			
40 (R=41.5)	bd	2.5~32.0/2.50	2.50						2.45	2.24	2.06	1.90					
	bb	2.5~17.5/5.00	5.00	4.30	3.75	3.31	2.96	2.66	2.41	2.20	2.02	1.86					
35 (R=36.5)	bd	2.5~32.1/2.50	2.50						2.46	2.25							
	bb	2.5~17.5/5.00	5.00	4.31	3.76	3.32	2.97	2.67	2.42	2.21							
30 (R=31.5)	bd	2.5~30.0/2.50	2.50														
	bb	2.5~17.7/5.00	5.00	4.34	3.79	3.35	2.99	2.70									

■ 传动机构 Mechanisms / TC5013A-5C

配置 Configuration			bd			bd			kW	
			I	II	III	I	II	III		
 起升 Hoisting	QS565	m/min	9.7	32.5	65	4.85	16.25	32.5	18/18/5	400m ① (6层 layers)
		t	2.5	2.5	1.25	5	5	2.5		
 回转 Slewing	HR55.130	r/min	0~0.6						5.5	① 超出咨询我们 Consult us if overtop
 变幅 Trolleying	BE24B	m/min	40/20						2.4/1.5	
	380v(±10%)50Hz	25.9kW								

■ 传动机构 Mechanisms / TC5013A-5G

配置 Configuration			bd			bd			kW	
			I	II	III	I	II	III		
 起升 Hoisting	H18SP13-400 (440V/60Hz)	m/min	11.64	39	78	5.82	19.5	39	6/21.6/21.6	400m ① (6层 layers)
		t	2.5	2.5	1.25	5	5	2.5		
 回转 Slewing	HR55.130 (440V/60Hz)	r/min	0~0.72						6.6	① 超出咨询我们 Consult us if overtop
 变幅 Trolleying	BE24B (440V/60Hz)	m/min	48/24						2.88/1.8	
	440v(±10%)60Hz	31.08kW								